

www.hsflamingo.com



 **AQUAFLAM**[®]

Aquaflam

Wood boiler stoves and fireplace inserts

wood boiler stove

aquaflam 7



Clean Burning



technical parameters

7 kW

Nominal power kW	7
Nominal power into water kW	5
Nominal power range kW	3 - 10
Power into water range kW	3 - 7
Stove efficiency %	79,1
Operation draught Pa	12
Smoke flue diameter mm	160
Log length cm	35
Heating value m ³	60 - 200
Weight kg	165
CO emissions (at 13% O ₂) %	0,1
Average flue gas temperature °C	247
Maximum operating pressure bar	2,5
Warranty	5 years

- + Primary, secondary and tertiary air supply
- + Secondary - perfect combustion
- + Dual air wash
- + Glass wash - glass is always clean
- + Option to connect air from the outside
- + Demountable frame before installation
- + Regulation (manual/electronic/automatic)
- + Ashtray
- + Extra long life gasket cord

black

cream


brown - velvet



grey

produced by HS Flamingo s.r.o.

www.hsflamingo.com

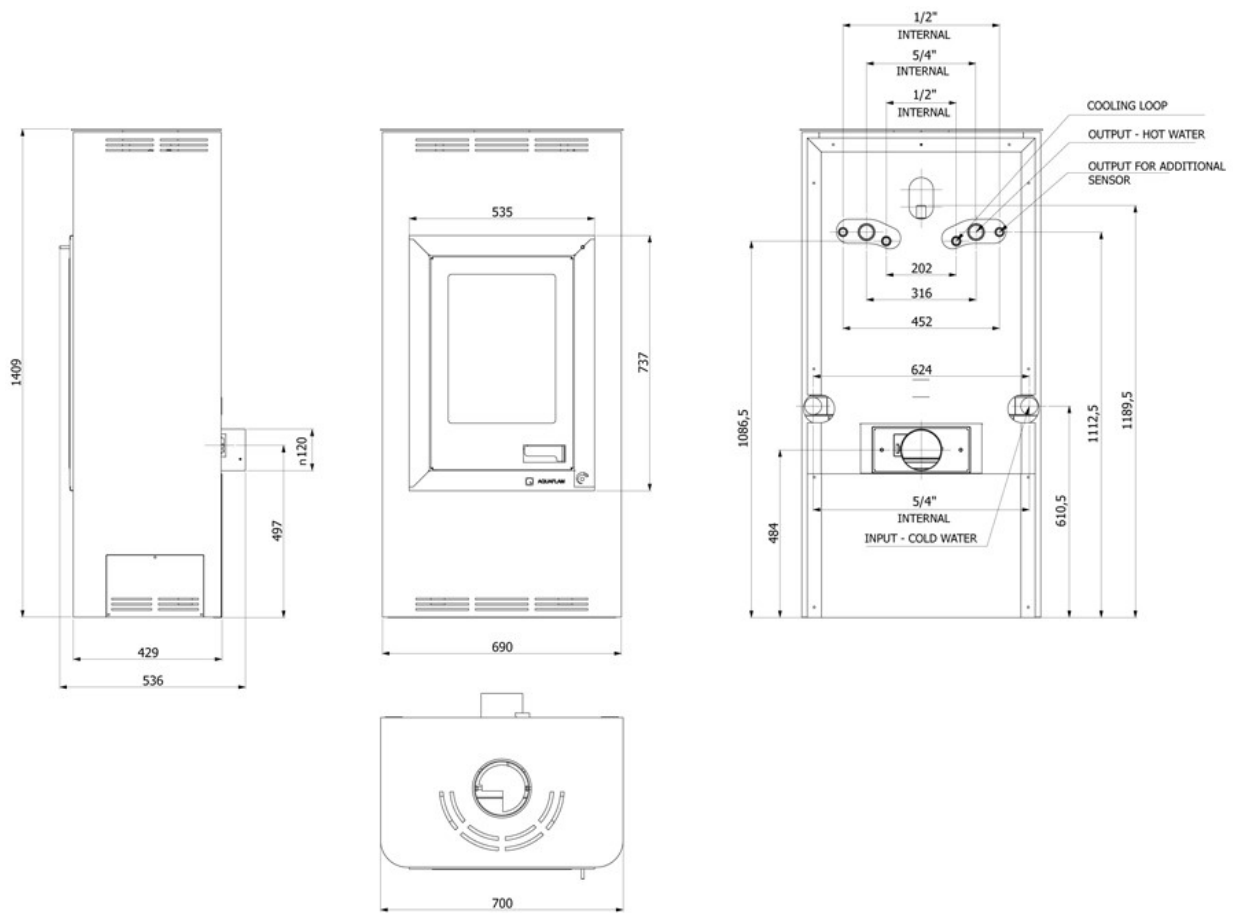

wood boiler stove

aquaflam 12



Clean Burning



technical parameters

12 kW

Nominal power kW	12
Nominal power into water kW	10
Nominal power range kW	8 - 16
Power into water range kW	8 - 12
Stove efficiency %	79,1
Operation draught Pa	12
Smoke flue diameter mm	160
Log length cm	35
Heating value m ³	160 - 320
Weight kg	175
CO emissions (at 13% O ₂) %	0,1
Average flue gas temperature °C	247
Maximum operating pressure bar	2,5
Warranty	5 years

- + Primary, secondary and tertiary air supply
- + Secondary - perfect combustion
- + Dual air wash
- + Glass wash - glass is always clean
- + Option to connect air from the outside
- + Demountable frame before installation
- + Regulation (manual/electronic/automatic)
- + Ashtray
- + Extra long life gasket cord

grey

black



cream



brown - velvet

produced by HS Flamingo s.r.o.

www.hsflamingo.com

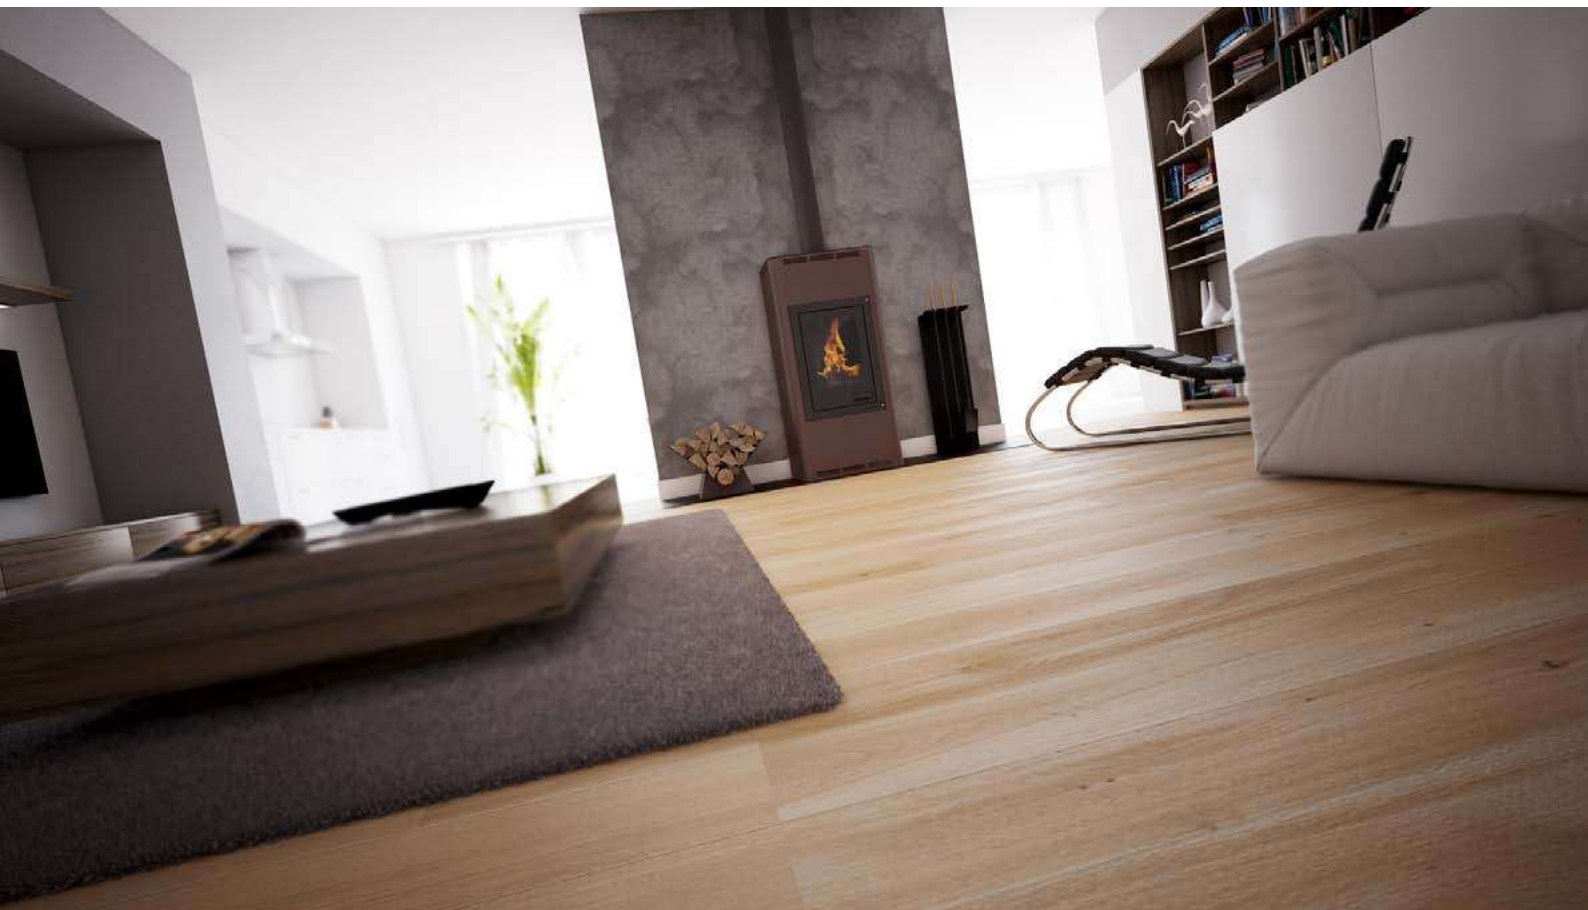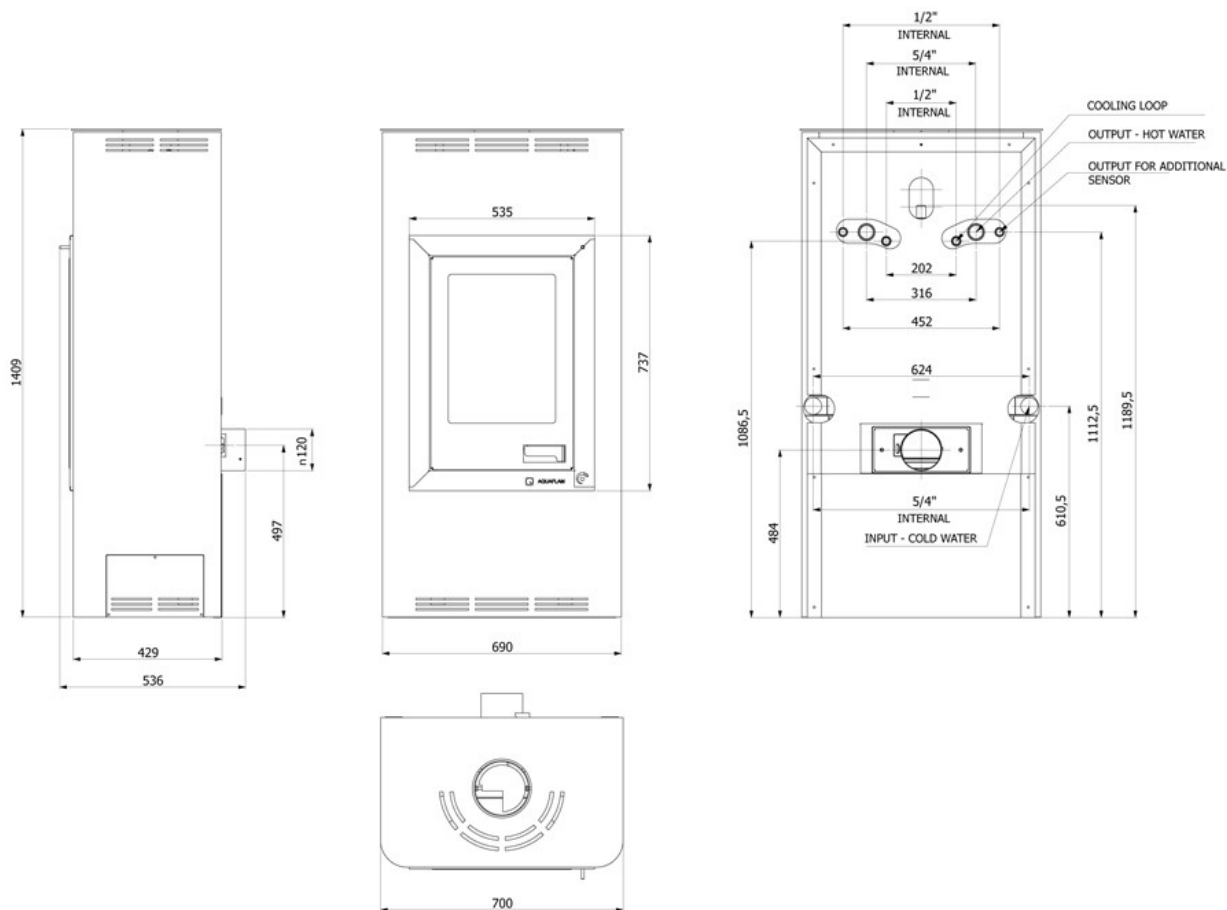

wood boiler stove

 eco design

aquaflam 17



Clean Burning



technical parameters

17 kW

Nominal power kW	17
Nominal power into water kW	14
Nominal power range kW	13 - 21
Power into water range kW	12 - 16
Stove efficiency %	79
Operation draught Pa	12
Smoke flue diameter mm	180
Log length cm	45
Heating value m ³	260 - 420
Weight kg	207
CO emissions (at 13% O ₂) %	0,1
Average flue gas temperature °C	255
Maximum operating pressure bar	2,5
Warranty	5 years

- + Primary, secondary and tertiary air supply
- + Secondary - perfect combustion
- + Dual air wash
- + Glass wash - glass is always clean
- + Option to connect air from the outside
- + Demountable frame before installation
- + Regulation (manual/electronic/automatic)
- + Ashtray
- + Extra long life gasket cord

brown - velvet

grey


black



cream

produced by HS Flamingo s.r.o.

www.hsflamingo.com

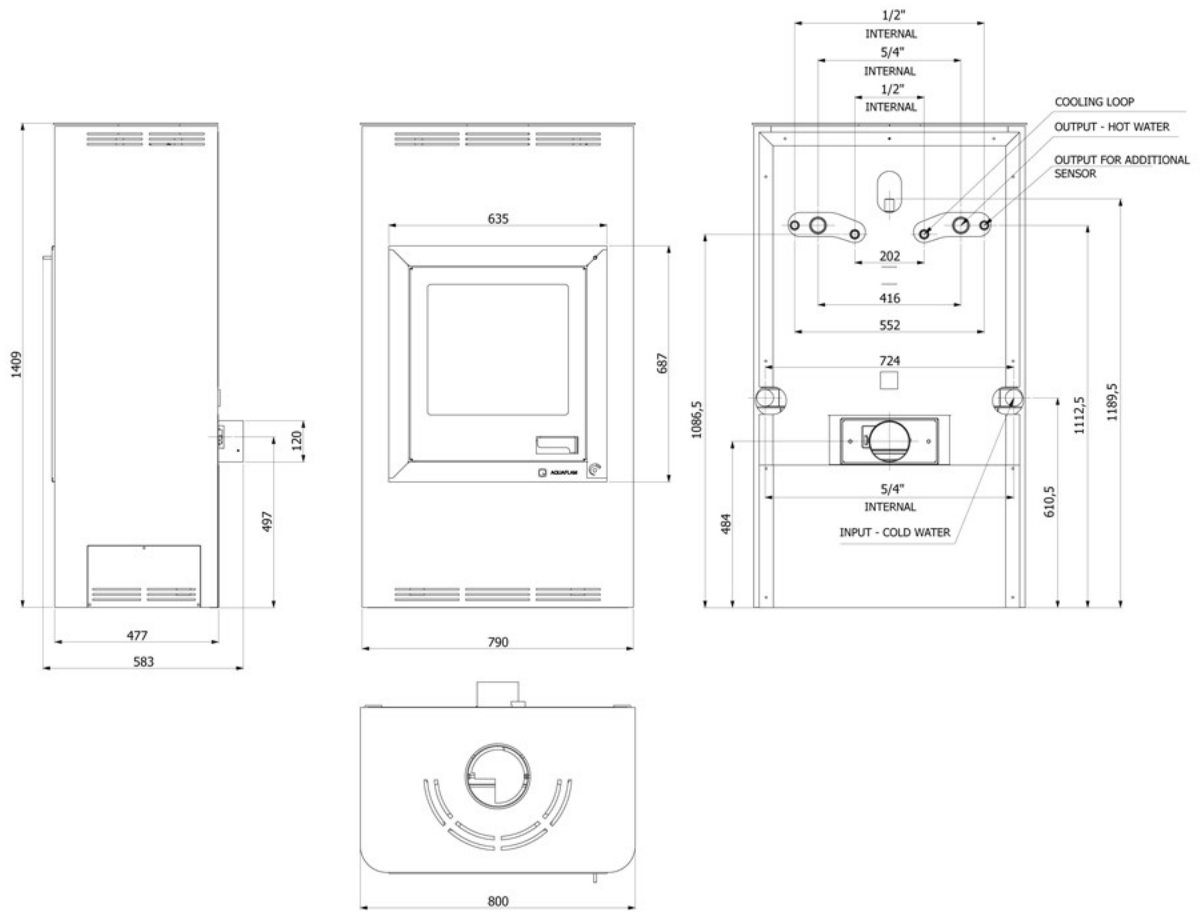

wood boiler stove

aquaflam 25



Clean Burning



technical parameters

25 kW

Nominal power kW	25
Nominal power into water kW	21
Nominal power range kW	21 - 30
Power into water range kW	19 - 23
Stove efficiency %	78
Operation draught Pa	12
Smoke flue diameter mm	180
Log length cm	55
Heating value m ³	420 - 600
Weight kg	228
CO emissions (at 13% O ₂) %	0,1
Average flue gas temperature °C	278
Maximum operating pressure bar	2,5
Warranty	5 years

- + Primary, secondary and tertiary air supply
- + Secondary - perfect combustion
- + Dual air wash
- + Glass wash - glass is always clean
- + Option to connect air from the outside
- + Demountable frame before installation
- + Regulation (manual/electronic/automatic)
- + Ashtray
- + Extra long life gasket cord

cream

brown - velvet

grey



black

produced by HS Flamingo s.r.o.

www.hsflamingo.com

